

EVER-THANE® COOL ROOF SYSTEM

EVER-THANE cool roof coating system is a cost effective way of prolonging the life of a flat roof. By using our maintenance coating system, property owners avoid the unnecessary time and high costs typically spent demolishing and replacing their roof. Our liquid applied coatings create a seamless, monolithic waterproofing membrane that provides high reflectivity and strong physical protection against deterioration from weathering and traffic, while resisting thermal shock.

EVER-THANE® BENEFITS & ADVANTAGES

- Saves Energy
- Environmentally Friendly
- No Tear-Off / No Demolition
- Reduces Heat Transfer into Building
- Keeps Building Cool
- Highly Durable
- Low Cost Maintenance
- Quick & Easy Installation
- Low VOC
- Can be Applied by Sprayer or Roller
- Highly Durability
- Excellent Chemical Abrasion Resistance
- Superior Physical Strength
- Hail and Wind Resistant
- Superior Color Retention

TYPES OF ROOF SYSTEMS:


- Built-Up Roof (BUR)
- Modified Bitumen
- Spray Polyurethane Foam (SPF)
- Aged Single-Ply: PVC, TPO, EPDM

WARRANTY

10, 15, and 20 year warranties available

SYSTEM DESCRIPTION

The Ever-Thane® System is comprised of a primer plus a selection of urethanes to cover and protect your roof:

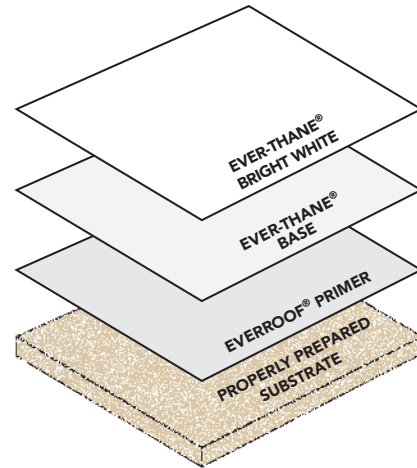

EVERROOF Primers

Innovative primers that are engineered for superior long-term adhesion to a variety of substrates, including concrete, metal, wood, modified bitumen / BUR, TPO, PVC, and EPDM.

EVER-THANE® BASE PLUS

A fire-retardant, aromatic, single-component, moisture-cured urethane coating designed for use as a base coat or for repair work. Also available in standard version.

EVER-THANE® BRIGHT WHITE PLUS

A fire-retardant, aliphatic, single-component, moisture-cured urethane coating designed for use as a top coat or for repair work. Available in standard and 250 VOC versions.





Ever-Thane						
	10 Year		15 Year		20 Year	
	Gal/Sq	Dry Mils	Gal/Sq	Dry Mils	Gal/Sq	Dry Mils
Metal	1.5	18	2.0	24	3.0	37
Mod-Bit / BUR	2.5	32	3.0	38	3.5	44
Single-Ply	2.5	32	3.0	38	3.5	44
Concrete	2.5	32	3.0	38	3.5	44

** Minimum dry film thickness requirements do not include joints, seams, flashings, cracks, splits, protrusions, drains other details where additional coating may be required. Coverage rates and gallons per square shown are approximate and do not include material losses during application. Moreover, certain surfaces may require additional coating or back rolling to achieve minimum millage requirements.